

The Milli-AMP

Quick Start Guide

Copyright ©2013 PRICOM Design



For More Information Check out our website:

WWW.PRICOM.COM

1 Quick Start

To get things going quickly, follow these simple steps:

1. Unpack the Milli-AMP.
2. Connect the Power Input.
3. Connect your Speakers.
4. Connect your audio source to the Audio Input.
5. Adjust the Volume knob to achieve desired audio level.

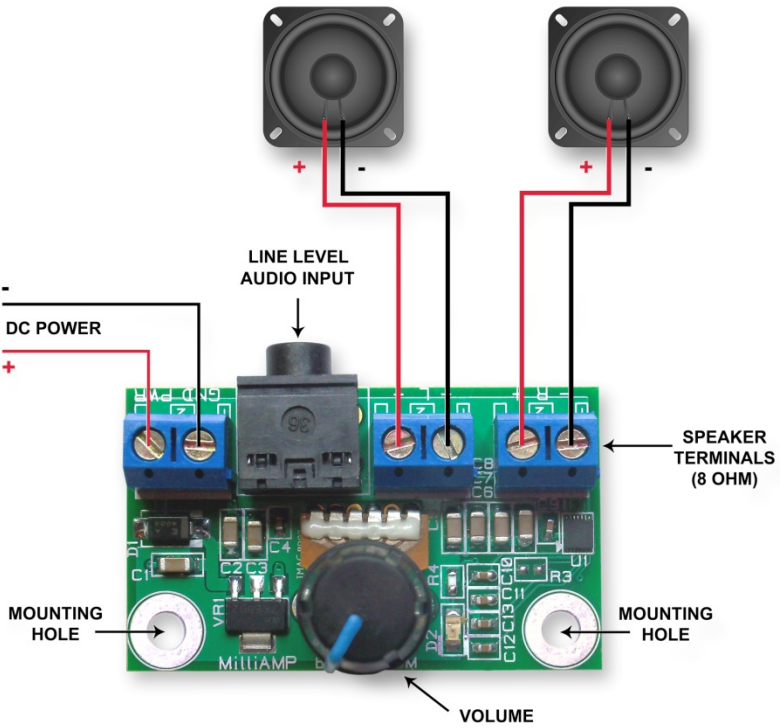


Figure 1 – Milli-AMP Connections



2 DC Power

The Milli-AMP accepts only DC Power. When properly connected and power is applied the on-board green LED will illuminate. If the wires are not connected in the proper orientation then the milli-AMP has a diode that prevents anything harmful from happening to the circuit itself. Should the wires be connected in reverse the LED will not light, and you simply have to reverse the wires.

The Milli-AMP may operate using 9 to 20 Volts DC, with 12 Volts being the preferred setting. When operating both speakers at full volume and using a 12 Volt supply the Milli-AMP will draw about 70mA.

3 Speaker Connections

The Milli-AMP has terminal strips that allow for the connection of two speakers. You may use both connections to achieve a stereo set-up, or you can operate a single speaker. Speakers rated as 8 Ohm with 2 Watt peak output or less are preferred for us with the Milli-AMP. Higher output rated speakers may be used, however slight distortion could result if the Milli-AMP is used to drive larger output speakers. Connecting the speakers is easy, simply connect the “-” and “+” terminals of the Milli-AMP to the “-” and “+” of the speakers

4 Audio Input

Audio is supplied to the Milli-AMP using a 3.5mm Stereo Audio Jack. You may connect the Milli-AMP to any device that provides line level audio out. Products such as, computers, CD Players, and of course, PRICOM Design Dream Players will all work great with the Milli-AMP.

5 Volume Knob

No audio amplifier would be complete without a Volume Knob. The Milli-AMP includes an On-Board volume knob that allows you to set the exact volume level for your personal application.



6 Support

If you have any questions, problems, or need assistance with the general use of your Milli-AMP, please contact us and we will do our best to help.

PRICOM Design
2755 Slocum Rd
Peyton, CO 80831
www.pricom.com
info@pricom.com

